

ALIO STAGE AND MOTOR SPECIFICATIONS


MODEL	UNITS	AI-LM-10000-U1I-S	AI-LM-15000-U1I-S	AI-LM-20000-U1I-S	AI-LM-25000-U1I-S	AI-LM-30000-U1I-S	AI-LM-40000-U1I-S	AI-LM-50000-U1I-S	AI-LM-60000-U1I-S	AI-LM-70000-U1I-S	AI-LM-80000-U1I-S	AI-LM-100000-U1I-S
TRAVEL	mm	100	150	200	250	300	400	500	600	700	800	1000
PERFORMANCE SPECIFICATIONS [1]		(STD) ULTRA NANO	(STD) ULTRA NANO	(STD) ULTRA NANO	(STD) ULTRA NANO	(STD) ULTRA NANO	(STD) ULTRA NANO	(STD) ULTRA NANO	(STD) ULTRA NANO	(STD) ULTRA NANO	(STD) ULTRA NANO	(STD) ULTRA NANO
LINEAR DISPLACEMENT ACCURACY	um	+/-5	+/-6	+/-8	+/-10	+/-12	+/-16	+/-20	+/-24	+/-28	+/-32	+/-40
BIDIRECTIONAL LINEAR REPEATABILITY	um	+/-0.5	+/-0.5	+/-0.5	+/-0.5	+/-0.5	+/-0.5	+/-0.5	+/-0.5	+/-0.5	+/-0.5	+/-0.5
RESOLUTION	nanometers											
STRAIGHTNESS	um	+/-3	+/-3	+/-4	+/-5	+/-5	+/-5	+/-6	+/-8	+/-8	+/-8	+/-10
FLATNESS [2]	um	+/-3	+/-3	+/-4	+/-5	+/-5	+/-5	+/-6	+/-8	+/-8	+/-8	+/-10
PITCH	arc-sec	10	10	15	15	18	18	18	18	20	25	25
YAW	arc-sec	10	10	15	15	18	18	18	18	20	25	25
ROLL	arc-sec	6	6	8	8	10	10	10	10	12	15	15
MOTION PROFILE SPECIFICATIONS												
MAX VELOCITY [3]	m/s	2.0	2.0	2.0	2.0	2.1	2.1	2.1	2.1	2.1	2.1	2.1
MAX ACCELERATION [3]	G	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
MAX (VERTICAL) PAYLOAD CAPABILITY	kg	40	40	40	40	40	40	40	40	40	40	40
MAX (HORIZONTAL) PAYLOAD CAPABILITY	kg	32	32	32	32	32	32	32	32	32	32	32
MAX MOMENT LOAD (YAW AND PITCH)	Nm	40	40	40	40	40	40	40	40	40	40	40
MAX MOMENT LOAD (ROLL)	Nm	35	35	35	35	35	35	35	35	35	35	35
ASSEMBLY MASS	kg	8	9.0	10	11	12	13	15	16.5	18.5	20	23.5
MOVING MASS	kg	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1

OPTION ("P") - NOTE 9.

OPTIONAL MOTOR WINDING
P16-2P (parallel)
30.48
500
0.20
130
DELTA
14.3
2.9
4.1
0.6
93
6.5
295
20.5
14.3

MOTOR INFORMATION	DEFAULT MOTOR
MOTOR TYPE	LINEAR BRUSHLESS SERVO MOTOR
MOTOR MODEL	P16-2
MAGNETIC PITCH (N-N)	30.48
MAX VOLTAGE (LINE TO LINE) [4]	500
ELECTRICAL TIME CONSTANT	0.20
MAX MOTOR TEMP	130
MOTOR CONNECTION	DELTA
FORCE CONSTANT	28.7
PHASE RESISTANCE (@25°C) [5]	11.7
PHASE RESISTANCE (@130°C) [5]	16.6
INDUCTANCE	2.3
CONTINUOUS FORCE [6]	93
CONTINUOUS CURRENT [6]	3.2
PEAK FORCE [7]	295
PEAK CURRENT [7]	10.3
BACK EMF CONSTANT	28.7

- Notes:**
- Specifications measured on stage centerline, 50mm above mounting surface. ALIO provides NIST traceable proof for all options/specs per quote.
 - Flatness specifications dependent on system base. Contact ALIO for more information.
 - Stage limitation at no load. Does not account for drive or resolution limitations.
 - Back EMF plus IR drop must not exceed maximum line to line bus voltage.
 - Resistance values do not include cable resistance. Cable resistance adds 0.146 ohm/m for Delta connection and 0.44 ohm/m for Wye Connection.
 - Continuous operating limits are based on continuous operation at maximum temperature with aluminum heat sink (300mm x 12.5mm x motor length).
 - Maximum on time at peak operating limits is 10 seconds.
 - All electrical specifications may vary by 12% from listed values.
 - Parallel coil motor "P16-2P" is an optional motor winding. Selection is designated by a "P" at the end of the stage model number.

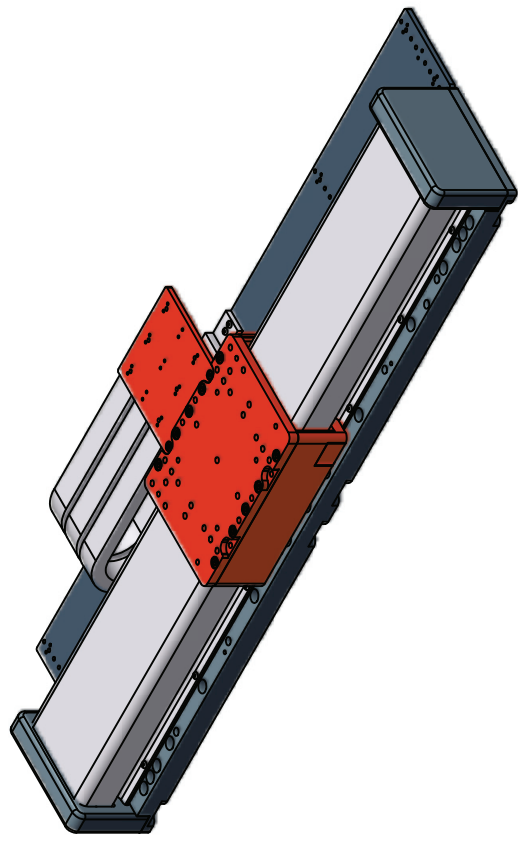

ALIO INDUSTRIES

AI-LM-(TRAVEL)00-μII-S

11919 W I-70 FRONTAGE ROAD NORTH, UNIT 119, WHEAT RIDGE, CO 80033 USA
(Tel) 303.339.7500 - SALES@ALIOINDUSTRIES.COM - WWW.ALIOINDUSTRIES.COM

DRAWN: NBROWN
CHECKED: []
DATE: 1/21/2011

Tolerances: Surface Roughness:
x.x ± .05 in [1.3 mm]
x.xx ± .01 in [0.25 mm]
x.xxx ± .005 in [0.13 mm]
Angles ± 0.5°

SIZE: B
DWG NO: 0010-08051

FINISH: SEE NOTES
SCALE: 1 OF 1

REV: 002